

INSTRUCTIONS

160951

- 1. Description of evidence found, note discrepancies in the record, state method of establishing corners.
- 2. Description of monument and accessories set to perpetuate the corner position.
- 3. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
- 4. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
- 5. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Northeast Section 31 T. 2 N R. 58 E P.M.M. Carter County


ORIGINAL RECORD: An iron post, 3 ft long, 2 ins. in diam. 30 ins. in the ground, with brass cap marked:

T2N R58E  
S30	S29
 S31 | S32  
 1944

FOUND: Found monument as per original record

SET: Monument in good repair no new monument set

S30    S.88° 03' 00" W.    S30 | S29  
 -----  
 S31    2674.32'    S31 | S32

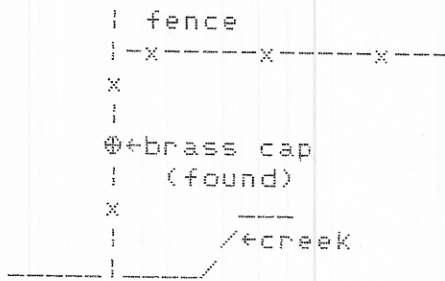

SKETCH OF CORNER

CERTIFICATION


I, \_\_\_\_\_ certify the information shown herein is true and correct.

Signature Ground Party Chief  
Jimmie LUMME  
 I, \_\_\_\_\_ certify that this Corner Recordation represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-2-101, et seq., M.C.A.)

Signature of Surveyor & Seal  
Pratt & Associates Eng. Inc  
 Date: 3-01-88 Reg. No. \_\_\_\_\_  
 Employer: \_\_\_\_\_

Office of Clerk and Recorder, County of Carter. This "corner record" was filed for record on June 17, 1988 was noted on the cross-index plat and is assigned page No. 188, in book No. 1

Sandra Kirkwood  
 County Official  
 Cross Index No. V-5 T. 2N R. 58E PMM



• - corner this sheet

160951