

# CERTIFIED CORNER RECORDATION

CORNER Sec. cor. Secs. 5,6,7,8 T 6N R 13 P.M.M. Granite COUNTY

Original record: Set a granite stone 18x14x9 ins. 12 ins. in the ground for cor. of secs. 5, 6, 7, 8, marked with 5 notches each on S. and E. edges; from which a fir 6 ins. dia. bears N67°E, 9 lks. dist. marked T6N, R13W S6 B.T.  
 A pine 5 ins. dia. bears S34 1/2°E, 114 lks. dist. marked T6N, R13W, S 8 B T.  
 A pine 5 ins. dia. bears S52°W, 162 lks. dist. marked T 6 N R 13 W B T.  
 A fir 5 ins. dia. bears N32°W, 68 lks. dist. marked T 6 N R 13W B T.

Found: I found a set stone with a mound of stone alongside. The stone was marked as described above, and had an iron pin drive alongside. The bearing tree in section 5 is standing. All other bearing trees are claimed by a logging operation.

**SEE C.O.S. FILED THIS SURVEY FOR DIMENSIONS BETWEEN CORNERS**



SKETCH OF CORNER

### CERTIFICATION

I, Cary Duncan  
 certify that the information herein is true and correct

\_\_\_\_\_  
 Signature of Ground Party Chief

I, Cary Duncan  
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

\_\_\_\_\_  
 Signature of Surveyor and Seal

Date: June 8, 2002 Reg. No. 4123-S

Employer: Self

Off: **044830 Roll - Page -**  
 rec: **Recorded 07/11/2002 At 02:55 PM**  
 wa: **BLANCHE PEDERSON, Cty Granite Clerk and Recorder**  
 Fee: \$ , By Boris Cousin


This "corner

\_\_\_\_\_  
 \_\_\_\_\_, in

\_\_\_\_\_  
 County Official

Cross index No. E-5 T 6N R 13W P.M.M.

Section 7

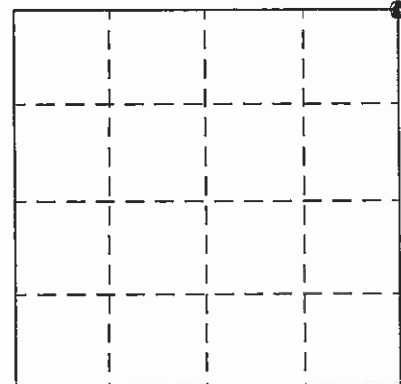

o=Corner this sheet