

INSTRUCTIONS

Q:CO-STD/152

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Corner No. 3 MS 2796 T. 7N. R. 8W. P.M.M. Powell County

1889 GLO Record: (MS 2796) Set a Limestone 18 x 12 x 7 ins., 14 ins. in the ground marked "3-2796". Raised a mound of earth alongside.

Found (6-3-2010): Nothing original for Corner No.3 was found. Area has been and continues to be heavily grazed.


Perpetuation (6-3-2010): Using parallel endlines and parallel sidelines methods with the found bearing along Line 4-1 (Found: S75°53'51"W) (GLO: S76°02'00"W) and the found bearing along Line 1-2 (Found: N13°35'29"W) (GLO: N13°28'00"W, we set a 5/8" x 30" rebar topped with a 3-1/4" aluminum cap protruding 0.3 ft out of the ground. We stamped the monument as shown below and created the following reference monuments

- A 5/8" x 24" rebar topped with a 1-1/2" AC, bears N36°E, 16.0 ft., mrkd "RM1".
- A 5/8" x 24" rebar topped with a 1-1/2" AC, bears N66°W, 19.2 ft., mrkd "RM2".

Note: We set a 5 ft red angle iron post with USFS decals P54-1 and P71-10, N76°W, 0.5 ft. from the monument .

NAD83(CORS96): ϕ 46°23'08.99"N λ 112°33'44.73"W


Note: Coordinates were established by Real-Time Kinematic (RTK) GPS procedures utilizing Trimble R8 GNSS GPS receivers. Survey ties to controlling PLSS corners and local control points were measured from a base station constrained to the NAD83(CORS96) datum processed utilizing the National Geodetic Survey (NGS) Online Positioning User Service (OPUS) with observation data collected in March, 2010.

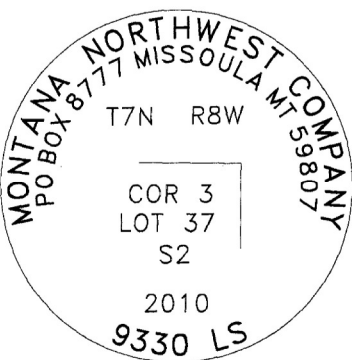 <p>SKETCH OF CORNER</p>	<p style="text-align: center;">CERTIFICATION</p> <p>I, <u>Travis Williams</u> certify the information shown herein is true and correct.</p> <p style="text-align: center;"><i>TW</i></p> <p style="text-align: center;">Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Record Act" (70-22-101, et seq., M.C.A.).</p> <p style="text-align: center;"><i>Ken E Jenkins</i></p> <p style="text-align: center;">Signature of Surveyor</p> <p>Date: <u>03/2010</u> Reg. No. <u>9330-LS</u></p> <p>Employer: <u>Montana Northwest Company</u> <u>P.O. Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-09</u> <u>USFS East Deer Lodge 2009/2010</u></p>
--	---

Sec. 2

Office of C... 165532 Fee: \$0.00 Bk Pg ...
 record" wa POWELL COUNTY Filed 9/2/2010 - At 3:30 PM
 was noted Diane S. Grey, Clk & Rcdr By *Jarita Beckels* in
 Return To: _____
 book No. _ _____

County Official



Cross Index No. D/E-20/21 T. 7N. R. 8W. P.M.M.
Corner No.3 MS 2796

● - Corner this sheet