

INSTRUCTIONS



Final and/or subsequent record used to evaluate the corner position.
 Description of evidence found, note discrepancies in the record, state method of establishing lost or

3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Southeast Section 25 T. 14N R. 60E P.M.M. Wibaux County

1. Had a copy of G.L.O. Plat.
2. Didn't find monument at this corner.
Set monument from Lines of Occupation.
3. Set #5 rebar with 2" aluminum cap stamped:

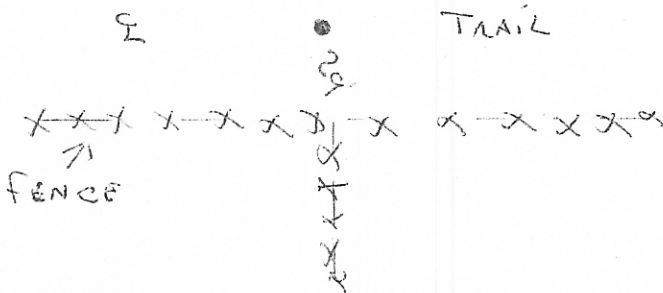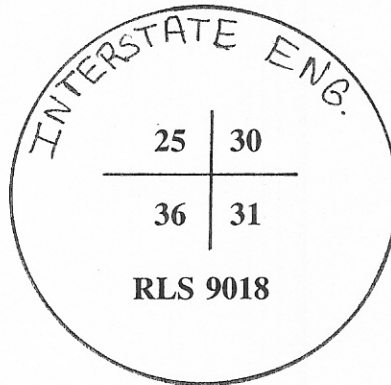

CERTIFICATION

I, RICHARD H. THOM
 Signature Ground Party Chief

I, Richard H. Thom
 Registered Professional Engineer (M.T. Reg. No. 22-105 R Reg. No. C.A.)

Signature of Surveyor & Seal

Date: 6/97 Reg. No. 9018S
 Employer: Interstate Engineering, Inc.

97814

SKETCH OF CORNER

Office of Clerk and Recorder, County of Wibaux. This "corner record" was filed for record on June 10, 1997 at 10:00 A.M. was noted on the cross-index plat and is assigned page No. 22-6, in book No. 2 Montana Board of Professional Engineers & Land Surveyors County Official

Sec. 25

Cross Index No. V-25 T. 14N R. 60E P.M.M.
 Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

• - corner this sheet