INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

AP Standard 1/4 Corner SECTION 36 T. 17N R. 14W P.M.M. Missoula & Powell County

ORIGINAL RECORD: (1890 G.L.O.) A point 650 ft. above foot of slope. A balsam, 6 ins. diam., which I marked S.C. 1/4S on N. side, for standard 1/4 sec. cor.; from which:
A Balsam, 8 ins. diam., bears S70°E 35 lks. dist.; marked SC 1/4S BT
A Balsam, 6 ins. diam., bears N30°W 47 lks. dist.; marked SC 1/4S BT

SUBSEQUENT RECORD: (1917 G.L.O.) "The standard 1/4 section corner, which is a pine post 4" square, 2 feet above ground marked and witnessed as a described.....I efface marks on post and bearing trees, and mark AP on N. face of post and AP BT on bearing trees.

SUBSEQUENT RECORD: (1985 Samuel R. Smith) Set Standard Aluminum Monument, marked as shown. Position calculated by holding record G.L.O Retractment Angle and Proportioning distance between Standard Corners. (1/4 S. line Sec. 36 and S.E. Corner, Sec. 36) New B.T.'s established:
7" Subalpine Fir inscribed "APBT" bears N78°E 15.8 feet.
15" Subalpine Fir inscribed "APBT" bears N21°W 52.5 feet.

EVIDENCE FOUND: Found 3 1/4" aluminum cap marked as shown below, from which:
A fallen 15" Subalpine Fir bears N21°W, a distance of 52.5 feet, scribe closed
A fallen 8" Subalpine Fir bears N78°E, a distance of 15.8 feet, scribe closed

PERPETUATION: Leave the monument in place from which we establish the following new accessories:
A 10" Subalpine Fir bears N12°W, a distance of 26.3 feet, scribed "AP S36 BT "
A 16" Subalpine Fir bears N80°E, a distance of 48.1 feet, scribed "AP S36 BT "

Set a Steel post with Forest Service Land Survey Monument decal north of monument, 2.0 feet distant.

All BT's have BT & LSM signs, snowblazes and red painted rings.

Corner lies on a 40% easterly facing slope.

Date of Survey: June 2011

Compass declination 14°

NAD 83 coordinates for this corner:
Latitude = 47°10'45.736"N Longitude = 113°19'27.503"W
NOTE: These coordinates are to be used as a search tool only.

MONTANA
KURT A. LUEBKE
13237LS
LICENSED
PROFESSIONAL LAND SURVEYOR

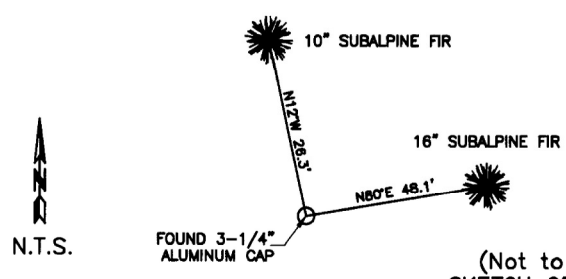

(Not to Scale)
SKETCH OF CORNER

CERTIFICATION

I, Henry Moua
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Kurt Luebke
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq. M.C.A.)

Signature of Surveyor & Seal

Date: January 22, 2013 Reg. No. 13237

Employer: DJ&A P. C.

Sec. 36

		AP	

• - corner this sheet

169161 Fee: $0.00 Bk Pg

POWELL COUNTY Filed 1/23/2013 At 9:50 AM
Diane S. Grey, Clk & Rcdr By Janita B Neckels
Return To: FILING

Cross Index No. Z-23 T. 16 & 17N R. 14W PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors