

INSTRUCTIONS

1. Original and/or subsequent : used to evaluate the corner position
2. Description of evidence found. Note discrepancies in the record, state method of establishing lost or obliterated corners
3. Description of monument and accessories set to perpetuate the corner position
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana
6. Fill in Cross Index & Section Diagram at bottom of sheet

61- 401818

**CERTIFIED CORNER RECORDATION**


Corner: Closing Corner Sections 2 & 3 T. 16N R. 20W P.M.M. Lake County

ORIGINAL RECORD: (1904 G.L.O.) Set a sandstone, 14x9x5 ins., 9 ins. in the ground marked CC on N.; with 1 groove on E. and 5 grooves on W. face; dig pits 24x18x12 ins., crosswise on each line, E. and W., 3 ft. and N. of stone, 7 ft. dist.; and raise a mound of earth 4 ft. base, 2 ft. high, N. of corner.

SUBSEQUENT RECORD: See corner recordation #191173. Drove a 3/8" steel rod on West side of stone. Placed a tag on a post 1' East of corner.


EVIDENCE FOUND: Found stone in fence line 9"x6"x4" out of ground with a 3/8" rebar along West side of stone, 1 notch on east side and 5 notches on west side of stone; post and tag 0.75' east of stone. The corner falls at the top of the river bank.

PERPETUATION: Set a 3/4" MDT aluminum cap on a 30" aluminum pipe in the position of the stone. The cap is marked as shown in the sketch. From which;  
 A post bears West, 12.4' distant; with a MARLS tag.  
 A post bears East, 0.55' distant; with a MARLS tag.

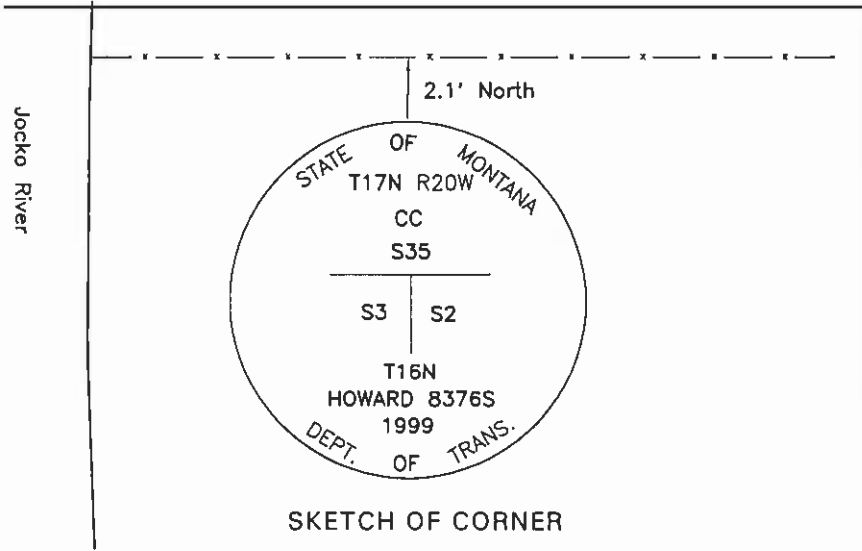

CERTIFICATION  
 I, Gerald McCarthy  
 certify the information shown herein is true and correct.  
*Gerald McCarthy*  
 Signature Ground Party Chief  
 I, Glenn R. Howard  
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)  
*Glenn R. Howard*  
 Signature of Surveyor & Seal  
 Date: 7-28-99 Reg. No. 8376 S  
 Employer: DJ&A, P.C.

Office of Clerk and Recorder, County of Lake. This "corner record" was filed for record on AUG 11 1999 10:44 AM as noted on the cross index plat and is assigned page No. 401818, in Book No. C-2244 RUTHIE HOWARD County Official *Ruthie Howard*



Cross Index No. A-17 T. 16N R. 20W PMM  
 Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors  
 •- corner this sheet

NC