

INSTRUCTIONS


1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 14/23 <sup>1/4</sup> T. T21N R. R29W P.M.M. SANDERS County

GLO RECORD: Set a sandstone 18 x 14 x 7 inches, 12 inches in the ground for <sup>1/4</sup> sec. cor. marked <sup>1/4</sup> on N. face, from which:  
 A pine, 14 ins., S. 7° 25' W., 116 lks. marked <sup>1/4</sup> S. BT  
 A pine 12 ins., S. 34° 42' W., 140 lks. marked <sup>1/4</sup> S. BT

FOUND: 1 1/2" Brass Cap in fence line next to large rock pile.

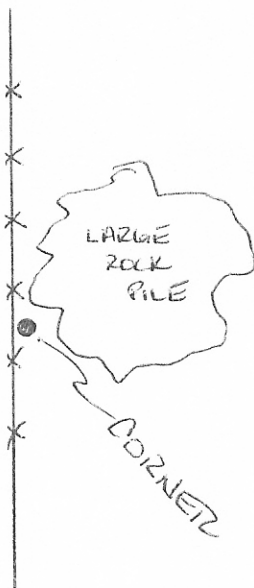

SKETCH OF CORNER

173006

CERTIFICATION

I, \_\_\_\_\_ certify the information shown herein is true and correct.

I, H. GENE WARTEN certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

H. Gene Warten  
 Registered Land Surveyor & Seal

Date: 7/8/84  
 Employer: ROCKY MOUNTAIN SURVEYORS

Office of Clerk and Recorder, County of Sanders. This "corner record" was filed for record on the Aug 10 day of 1984 was noted on the cross-index plat and is assigned page No. 565, in book No. 2

Dixie Vaughn (M.D.A.)  
 County Official  
by Evelyn Costley

Sec. 23


Cross Index No. N19 T. 21N R. 29W P.M.M.

• - corner this sheet