

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)


Found 2½"Ø pipe w/U.S.C.S. brass cap.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: 11/17/75

Accessories: Set ½"Ø x 12" rebar South 10.00 feet.
Set ½"Ø x 12" rebar East 10.00 feet.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

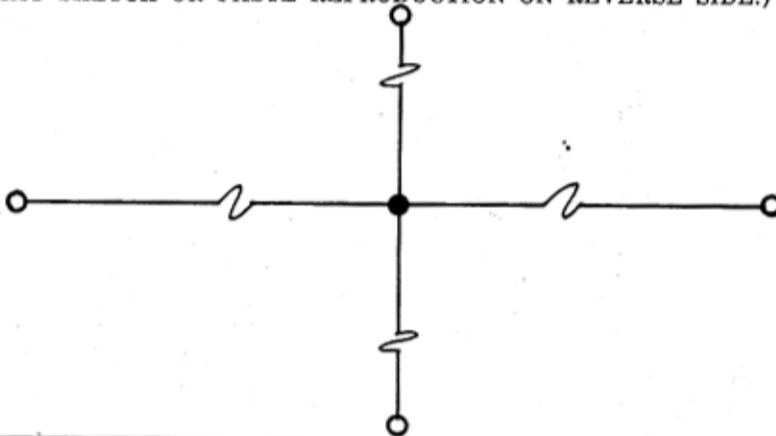

Surveyor's Seal



I, Robert E. Findorff
certify that the information shown herein is true and correct.


Signature of Ground Party Chief

I, Robert E. Findorff
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Signature of Surveyor Robert E. Findorff

3976 MS
Registration Number

DIAGRAM OF CORNER:
T24N, R5W, MPM

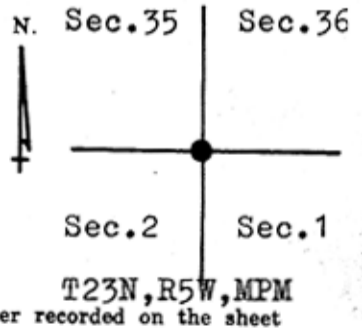

Office of Clerk and Recorder, County of DeWitt 323883

This "corner record" was filed for record on the 12th day of July 1976, was noted on the cross-index plat and is assigned page No. _____, in book No. _____

By: Mary N. Baker
County Official

Cross Index No. 2-21 T. 24N R. 5W Mer. 7526
A-21 23N 5W