

INSTRUCTIONS

61-332176

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner NE Section 25 T. 24N R. 22W P.M.M. Lake County

Record:

(1904 GLO) Set a trap rock 15" x 8" x 6", 40" in the ground for the corner of sections 19, 24, 25 & 30 marked with 2 notches on South and 4 notches on North edge, dug pits 18" x 18" x 12" in each section. 5 1/2' dist. and raised a mound 4 foot base 2 feet high West of corner.


Found:

No evidence of original stone monument, corner position falls in road intersection, Found 5/8" rebar set by "Marengo RLS 9012" and this position was previously occupied by a bent over 5/8" rebar, with no cap, and was accepted as section corner position on a previous survey.

After completion of road construction. I reset a 5/8" x 24" rebar, with cap stamped "Marengo RLS 9012" in the position of the previously set rebar and cap. This monument is set in monument case and lid at the centerline of a East-west road.

Before construction began I referenced a found 3/8" steel pin with no cap, bearing of N8°20'W, 31.75 feet, also a found rail road spike, bears S29° 17'W, 9.49 feet.

As both the 3/8" steel pin and the rail road spike did not occupy the section corner position. I did not reset or remonument them after construction.

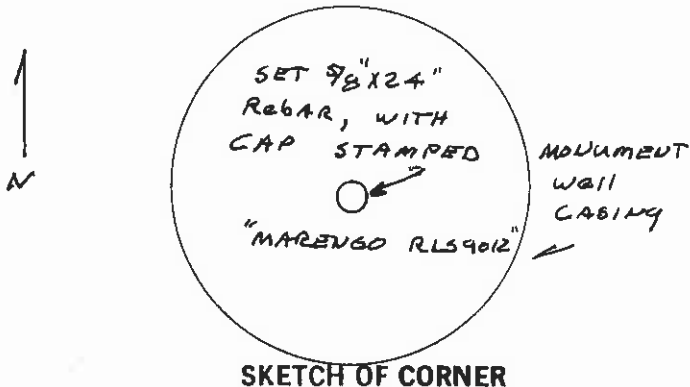

MONTANA
SURVEYORS

I, _____ certify the information shown herein is true and correct.

* GREGORY B. MARENGO *

Signature of Ground Party Chief
9012'S


I, Gregory B. Marengo certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq.) M.C.A.R.V.

Gregory B. Marengo
Signature of Surveyor & Seal

Date: 8-7-91 Reg. No. 9012

Employer: _____

Office of Clerk and Recorder, County of Lake This "corner record" was filed for record on AUG 16 '91 at 10:35 A.M. was noted on the cross-index plat and is assigned # 332176, in @-1849 RITCHEY, HOWES County Official

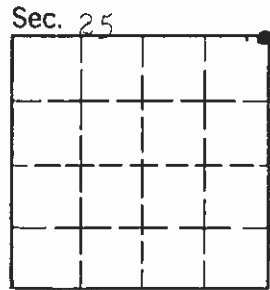

By: Judy Ann Allen
N/C

Cross Index No. R-25 T. 24N R. 22W P.M.M.

• - corner this sheet