



INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner SE Cor Sec 27 T. 33N. R. 16E P.M.M. Hill County

August 1993 - Found stone in place. 1 slash mark on South Face + 2 on East Face of Stone.
 This stone was found and used for the survey of land described in BID-P630 and shown on COS for Mike Wojtowick.

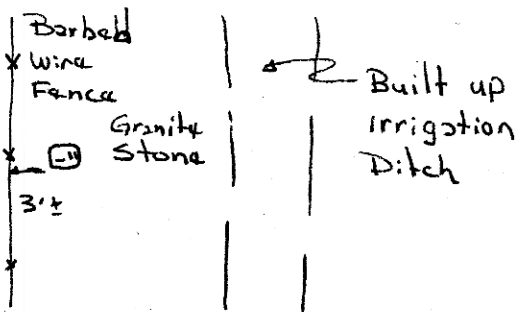

SKETCH OF CORNER

CERTIFICATION

I, Ronald G Turner
 certify the information shown herein is true and correct.
Ronald G Turner
 Signature Ground Party Chief

I, Ronald G Turner
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)
Ronald G Turner
 Signature of Surveyor & Seal

Date: 8-20-93 Reg. No. 9096LS

Employer: _____

Office of Clerk and Recorder, County of HILL. This "corner record" was filed for record on NOVEMBER 8TH, 1993 was noted on the cross-index plat and is assigned page No. XXXXX, in book No. XXXX

Candice Patuck
DIANE E. MELLEM,
 County Official
 DEPUTY

Cross Index No. V-17 T. 33 R. 16 P.M.M.
 Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

