


CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

From Book 1697, Page 3 (451): Set sandstone, 16x10x5 in., 11 ins. in the ground.....marked 3 notches on S & E edges & raised a mound of stone alongside. Pits impracticable."

Found: Stone of proper size in large cairn with old post. 3 grooves on S. face; 3 grooves on E. face; "x" on top.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

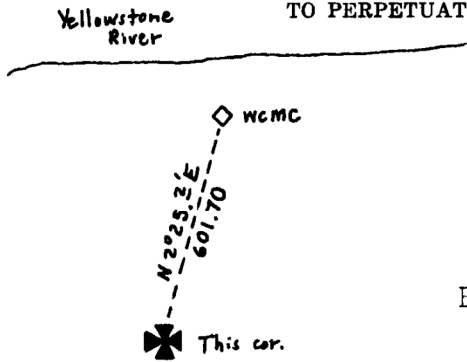

Date of work: 3/24/80

Nothing done

Bearings from "true north", C/S 277.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

Surveyor's Seal



I, _____ certify that the information shown herein is true and correct.


Signature of Ground Party Chief

I, Henry A. Rate certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Henry A. Rate
Signature of Surveyor

DIAGRAM OF CORNER:

N. T9S
R8E
MPM



= Corner recorded on the sheet

3716S
Registration Number

168580

Office of Clerk and Recorder, County of Park

This "corner record" was filed for record on the 29th day of January, 1982, at 11:00 o'clock AM, was noted on the cross-index plat and is assigned page No. 31, in book No. one.
Margaret Monical
County Official