

CERTIFIED CORNER RECORDATION

CORNER 1/4 cor. Sec. 7-18 T 6N R 13W P.M.M. Granite COUNTY


Original record: Set a quartzite stone 14x10x5 ins. 10 ins. in the ground for 1/4 sec. cor. marked 1/4 on n. face; from which a pine 4 ins. dia. bears North, 38 lks. dist. marked 1/4 S 7 B T. A pine 5 ins. dia. bears S 37° E, 55 lks. dist. marked 1/4 S 18 B T.

Found: I found a set stone as described above. The north bearing tree is standing with blaze painted red.

SEE C.O.S. FILED THIS SURVEY FOR DIMENSIONS BETWEEN CORNERS

CERTIFICATION

I, Cary Duncan
certify that the information herein is true and correct


Signature of Ground Party Chief

I, Cary Duncan
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)


Signature of Surveyor and Seal

Date: June 8, 2002 Reg. No. 4123-S


Employer: Self



SKETCH OF CORNER

Office **044834** Roll - Page - _____ his "corner"
 recorded **07/11/2002 At 02:10 PM** _____
 was n **BLANCHE PEDERSON, Cty Granite Clerk and Recorder** _____, in
 Fee: \$, By Paris Cousine
 book No. _____ County Official _____
 Cross index No. J-3 T 6N R 13W P.M.M.

Section 7

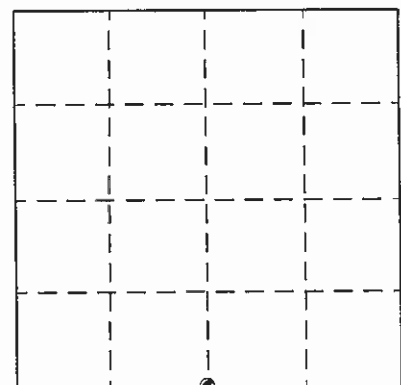

●=Corner this sheet