

CERTIFIED CORNER RECORDATION

CORNER 1/4 cor. Sec. 6-7 T 6N R 13W P.M.M. Granite COUNTY

Original record: Set a granite stone 12x10x5 ins., 8 ins. in the ground for 1/4 sec. cor. marked 1/4 on n. face; from which a pine 6 ins. dia. bears N11 1/2° W, 45 lks. dist., marked 1/4 S 6 B.T.. A fir 10 ins. dia. bears S61 1/4° E, 40 lks. dist. marked 1/4 S 7 B.T..

Found: I found the North bearing tree alive and standing, with scribing clearly visible. The corner stone was disturbed by a logging operator, but was still set and was painted blue. The bearing tree in Section 7 was removed by a logging operation.

I set a #5 re-bar with yellow plastic cap (Duncan 4123-S) at the north side of the stone and made my measurement to the top center of the stone.

SEE C.O.S. FILED FOR DIMENSIONS BETWEEN CORNERS



SKETCH OF CORNER

CERTIFICATION

I, Cary Duncan
certify that the information herein is true and correct

Signature of Ground Party Chief

I, Cary Duncan
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor and Seal

Date: June 8, 2002 Reg. No. 4123-S

Employer: Self


Office **044835** Roll - Page -
reco **Recorded 07/11/2002 At 02:15 PM**
was **BLANCHE PEDERSON, Cty Granite Clerk and Recorder**
Fee: \$, By Doris Cousins
book , ... _____ County Official

Cross index No. E-3 T 6N R 13W P.M.M.

This "corner

_____, in

Section 7

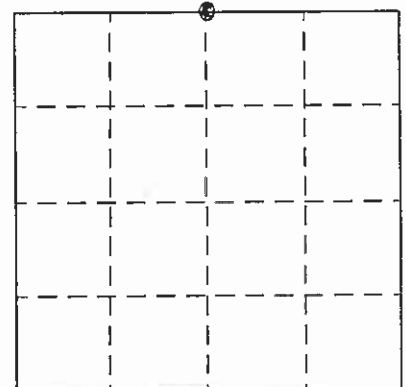

●=Corner this sheet