

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

Original Record: Set a sandstone 14x12x4 ins. 9 ins. in the ground for cor of Secs. 32 & 33. Marked with 4 notches on E. and 2 notches on W. edges dig pits 24x24x12 ins. in each sec. 6 ft. dist; and raise a mound of earth 4 ft. base 2 ft. high W. of cor.

Found no sign of stone or pits.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: Aug. 1979

Set a brass cap by proportionate measurement.


1979

Cap is 3 1/2" in diameter, and on a 2 3/8" galvanized pipe. Cap is stamped

T.7N. 32 | 32 R.26E. T.6N.

Logan Wasia 4235S

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

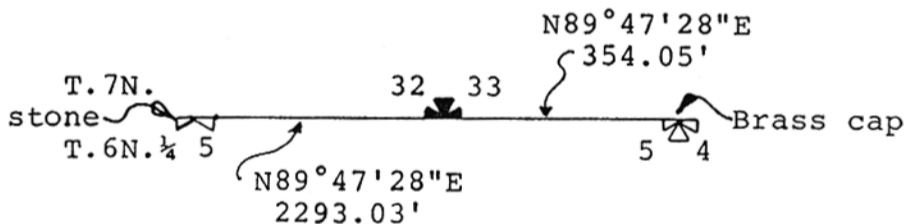

Surveyor's Seal

DIAGRAM OF CORNER:

I, _____ certify that the information shown herein is true and correct.

N.

T.7N. 32 | 33

T.6N.

R.26E.

= Corner recorded on the sheet

Signature of Ground Party Chief

James E. Logan

I, _____ certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Handwritten signature of James E. Logan

Signature of Surveyor

4235 S Registration Number



Office of Clerk and Recorder, County of Muskegon

This "corner record" was filed for record on the 8 day of November 1979, was noted on the cross-index plat and is @ 12:30 P.M.

assigned page No. _____, in book No. _____

Handwritten signature of Frances L. Lawson, County Official

Cross Index No. 29 T. 7N R. 26E Mer.