

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: SW Cor. Sec. 13 T. 7 N. R. 59 E. P.M.M. FALLON County



Original Record: GLO 1907 – 80.00 Chains: Set a Sandstone 16 x 12 x 6 ins., 11 ins., in the ground for cor. of secs. 13, 14, 23 and 24, marked with 3 notches on S. and 1 notch on E. edges; dig pits, 18 x 18 x 12 ins., in each sec. 5 1/2 ft. dist.; and raise a mound of earth, 4 ft. base, 2 ft. high, W. of cor.

Subsequent Record: Certified Corner Recordation, Doc. No. 47369, Pg. 209-210, Bk. 1, Fallon County; 7327S: Re-established the southwest section corner of Section 13 from the southwest and southeast reference corners of certificate of survey number 29512. At the time of re-establishing the corner I set a 6" spike nail. Future construction on the county road is anticipated and would destroy any monument set. After construction a rebar with 2" aluminum monument will be set.

The monument is referenced as shown below and on the reverse side of this form.

Found: A 5/8 in. rebar at the center of the westbound driving lane of Gregory Ave. The top of the rebar is 0.5 ft below the surface of the road. No aluminum cap was found.

Set A 3 1/2-in. aluminum cap on the found rebar. Cap is marked as shown below. Set a witness post, a 6-ft. steel u-post with a MDT decal, 52 ft. south at a fence corner. Set two references in fence posts to the northwest and south as shown in the sketch below.

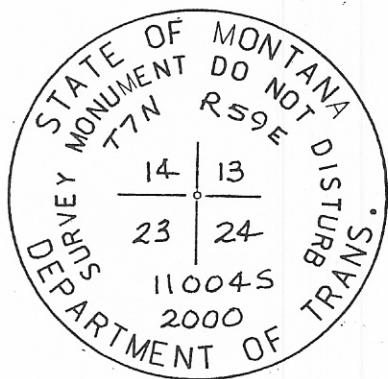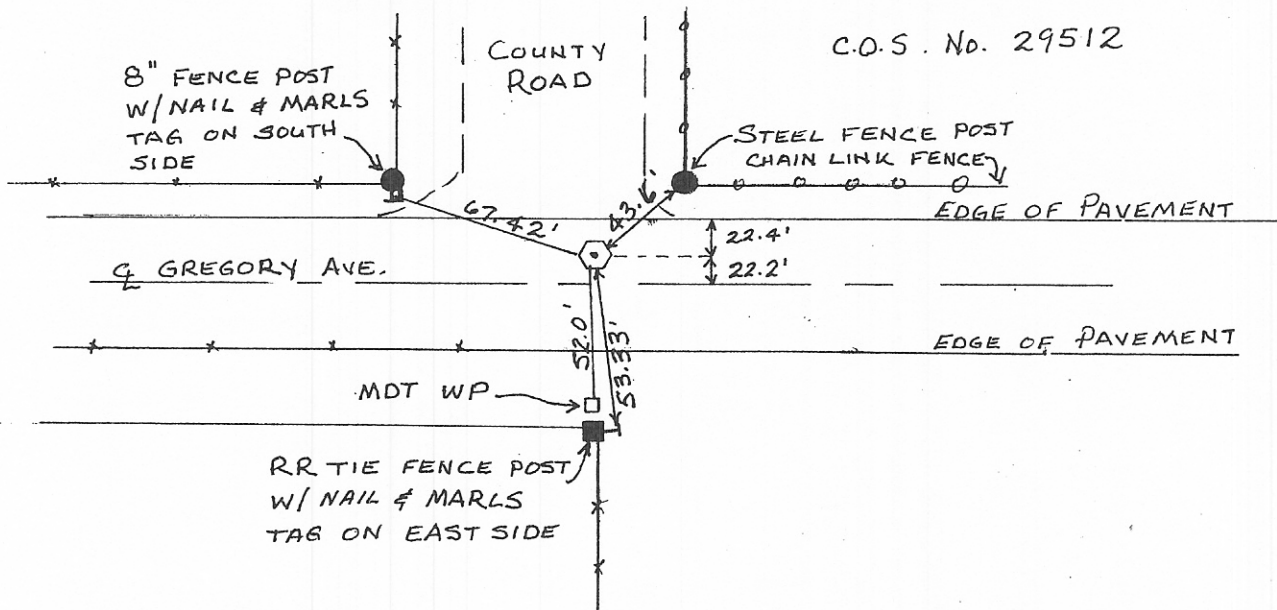

SKETCH OF CORNER **77762**

CERTIFICATION

I, _____, certify the information shown herein is true and correct.

Signature of Ground Party Chief: CAROLE E. SANDIN
11004L.S.

I, Carole E. Sandin, certify that this Corner Record correctly represents work performed by me or under my direction in accordance with the "Corner Recordation Act" (70-22-104) and I am a duly Licensed Professional Land Surveyor.

Signature of Surveyor & Seal: Carole E. Sandin

Date: 7-31-2000 Reg. No. 11004S
Employer: MDT

Office of Clerk and Recorder, County of FALLON. This "corner record" was filed for record on AUGUST 28, 2000 AT 11:30 A.M. was noted on the cross-index plat, and is assigned Page No. 814, in Book No. 1.

Mary Lee Dietz
FEE: N/C dey County Official

BOOK **1** PAGE **814**

Cross Index No. N-21 T. 7 N. R. 59 E., PMM

Sec. 13

• — Corner this sheet