

**INSTRUCTIONS**

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**

Corner SW Cor. Sec. 32

T. 8 N., R. 9 W. P.M.M.

Powell County

**Subsequent  
Record – B L M  
1997**

**Dependent Resurvey, dated October 2, 1997:**

Found no remaining evidence of the original corner. At the point for the corner of Sections 5, 6, 31 and 32 (at a proportionate measurement) set an aluminum rod 5/8 in diam., 19 in. long, flush with the surface of the north shoulder of an E-W road, with a magnetic marker at the base and an Aluminum Cap.

From which:

A standard monument was set 22 ins. in the ground for a reference monument, with a steel fence post set alongside, bearing N 45° 50' E, a dist. of 44.60 ft. with a Brass Cap mkd; RM T8N R9W S32 44.60 FT. 1997 and an arrow pointing to the corner.

A standard monument was set 22 ins. in the ground for a reference monument, with a steel fence post set alongside, bearing N 38° 09' W, a dist. of 44.80 ft. with a Brass Cap mkd; RM T8N R9W S31 44.80 FT. 1997 and an arrow pointing to the corner.

**Subsequent  
Record –  
Druyvestein,  
Johnson &  
Anderson  
1998**

**Corner Recordation:** Office of the Clerk and Recorder of Powell County, January 2<sup>nd</sup>, 1998  
The record monuments per BLM.

**Found – MDT  
1998**

**Found:** The record monuments per BLM.


**Set – MDT 1998**

**Set:** 5/8" rebars with red plastic caps. See back.

**Set – MDT 1999**

**Set:** A Montana Department of Highways 3½ in. aluminum monument from Reference Marks, 24 ins. long, 30 ins. in the ground, Aluminum Cap mkd; STATE of MONTANA T 8 N R 9 W , S31 S32 S6 S5 T 7 N 4378S 1999 Department of Highways.

**Set:** A Montana Department of Transportation 2 in. Aluminum Cap (for a reference monument) on a 5/8 in. rebar 30 ins. in the ground, 15 ft. west of the centerline of a field approach along the south R/W fence and 2.8 ft. north of the fence, bears S 45° 50' W, 113.34 ft. dist. Nailed a plastic MARLS tag to fence post 2' SW.

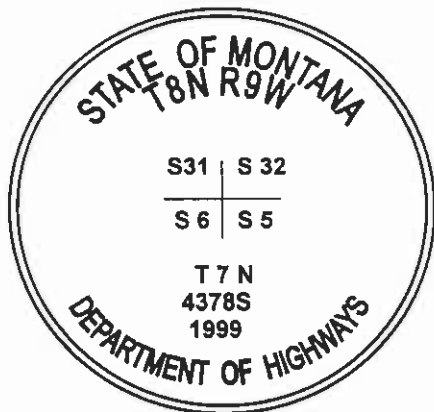

147214

**SKETCH OF CORNER**

**CERTIFICATION**

I Henry D. Kapp  
certify the information shown herein is true and correct.

*Henry D. Kapp*  
\_\_\_\_\_  
Chief of Ground Party

I, David R. Davy **DAVID**  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (MCA) (22-101-01 et seq., MCA)

*David R. Davy*  
\_\_\_\_\_  
Signature of Surveyor & Seal

Date: 6/99 Reg. No. 4378 S

Employer: MDT

Office of Clerk and Recorder, County of Powell. This "corner record" was filed for record on June 25th, 1999 @ 10:45 A.M. was noted on the cross-index plat, and is assigned Page No. \_\_\_\_\_ in Book No. \_\_\_\_\_

N/C

*Karla M. Anderson*  
\_\_\_\_\_  
County Official

**Sec. 32**

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

• — Corner this sheet

Cross Index No. Z-05 T. 8N R. 9W PMM