

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

1/4 Corner Sections 33 & 34 T. 16 N. R. 13 W. P.M.M. Powell County

ORIGINAL RECORD: (U.S. Surveyor W. H. Thorn, July 23, 1898)
 Set a sandstone 17"x 13"x 6", 12" in the ground, marked 1/4 on W face from which;
 A fir, 10" diam, bears N57°W, 16 links (10.5') marked "1/4 S., B.T."
 A tamarack, 14" diam, bears N89°E, 33 links (21.7') marked "1/4 S., B.T."

SUBSEQUENT RECORD: None

EVIDENCE FOUND: Found original stone, 10"x 5"x 16", buried in the ground, marked "1/4" on W. face, from which;
 A stump, 20" diam, bears N89°E, 21.7' with partial scribing visible.
 Stump hole with roots, bears N57°W, 10.5'


PERPETUATION: In the position of the found stone, set a 1"x 40" rebar, 36" in the ground with a 3 1/4" aluminum cap marked as shown below and buried the original stone along side. Established new bearing trees:
 A Douglas fir, 11" diam, bears N75°E, 27.4 feet, Scribed "RM"
 A Lodge pole pine, 13" diam, bears N30°W, 35.2 feet, Scribed "RM"

Affixed BT & ATTN. signs, snow blazed and painted red rings on BTs, rock ringed corner.


Corner falls in the southwest quadrant of a north-south-west fence intersection.

Date of Survey: October, 2009.

Magnetic Declination = 14.15°

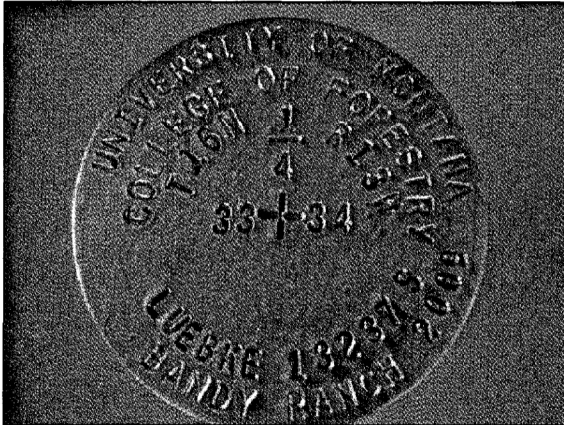


NAD 83 coordinates for this corner:
 Latitude = 47°05'58.3"N Longitude = 113°14'23.8"W
 NOTE: These coordinates are to be used as a search tool only.

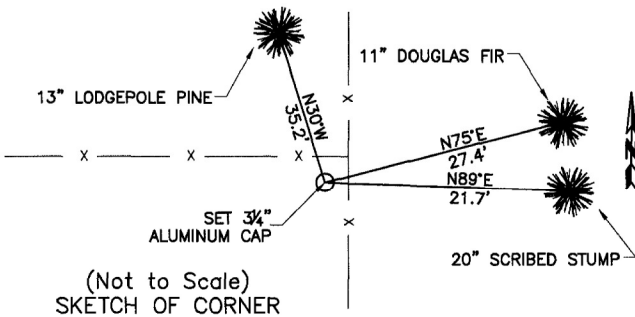

CERTIFICATION
 I, Gary Little
 certify the information shown herein is true and correct.
 Signature Ground Party Chief
 I, Kurt A. Luebke
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)
 Signature of Surveyor & Seal
 Date: 1-5-2010 Reg. No. 13237 S
 Employer: DJ&A P. C.

Sec. 34



• - corner this sheet

164559 Fee: \$0.00 Bk Pg

POWELL COUNTY Recorded 1/5/2010 At 10:30 AM
 Diane S. Grey, CLK & Rcdr By Jarvis Oneckels
 Return To: FILING

Cross Index No. X-13 T. 16 N. R. 13 W. PMM