

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

80.00 Set a sandstone, 18x10x5 ins., 12 ins in the ground for the closing corner of Tps. 16 N., Rs 19 and 20 W., marked C C T 16 N on S. R 19 W on E. and R 20 W on W. with 6 grooves on S., E. and W. faces, and raised a mound of stone, 2 ft. base, 1 1/2 ft. high S. of cor.

After extensive search with a backhoe, no evidence of the original stone was found. The record position from the proportionally reestablished standard corner for sections 31 and 32 was used to replace this corner. The road interesection fits quite well.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: June, 1972

Set 1 1/4x30 inch pipe with 3 inch aluminum cap 5 inches below the road surface from which,

A plastic cap nailed on the south side of a power pole bears N 55°W, 47.25 feet.

A plastic cap on the East side of a power pole bears S 56°W, 47.8 feet

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

See attachment A-23

Surveyor's Seal


I, ..... certify that the information shown herein is true and correct.

Signature of Ground Party Chief

I, R. David Schurian certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

R. David Schurian Signature of Surveyor

DIAGRAM OF CORNER:

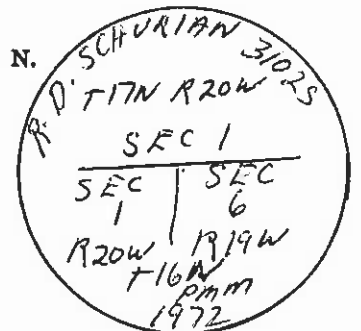

= Corner recorded on the sheet

3102S Registration Number

Office of Clerk and Recorder, County of Lake

This "corner record" was filed for record on the JUN 29 1972 day of 8:24 a.m. 19....., was noted on the cross-index plat and is

assigned page No....., in book No. C-258

ETHEL M. HARDING

County Official