

1. Original and/or subsequent record used to evaluate the corner.
2. Description of evidence found, note discrepancies in the record.
3. Description of monument and accessories set to perpetuate the corner.
4. Sketch of corner, show all pertinent data which can best be shown. Sketch example, corner marking, topography ties, position of monument, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

58433

81-2158

CERTIFIED CORNER RECORDATION


Corner T. 19N R. 27W P.M.M. Mineral County

FOUND - 3/4" pipe mounded in stone believed to have been set by Homer Benson before WW II. Also found yellow location poster at this position initialed by H.L. Gill, dated 10-41, showing the approximate corner position was known by him. We also found yellow location poster tag West and North of this corner referencing this position. We found a 23" scribed Fir bearing S. 64° W., 27.2 feet. We found a 24" Pine bearing S. 11° E., 49.9 feet. We found a Fir stump bearing S. 49 1/2° E., 16.7 feet.

RECORD - Set a post 4 feet long, 4" square 24" in the ground for the corner to section 3, 4, 33 and 34 from which:
 A 10" Tamarack bears N.45° E., 30 links marked T.19N., R.27 W., S 34 BT (nothing found)
 A 12" Fir bears S. 55° E., 42 links marked T. 18 N., R. 27 W., S 3 BT (nothing found)
 A 12" Tamarack bears S. 22° W., 9 links marked T. 18 N., R.27 W., S 4 BT (nothing found)
 A 8" Fir bears N. 05° W., 11 links marked T. 19N., R. 27W., S 33 BT (nothing found)

I positioned this corner at the location of the 3/4" iron pipe due to the acceptance of this pipe for some 40 years as the corner and no real evidence to position the corner elsewhere. A mathematical positioning would move this corner some 22 feet West, but no suitable evidence was found at that position. I would like to think that those original foresters and surveyors were closer to the original evidence than we are today.

We established the following 3 RM trees:
 A 25" Pine bears S.09° E., 50.0 feet, unreadable existing scribing.
 A 15" Fir bears S. 36° W., 33.0 feet scribed T.18N., R. 27W., S 4 RM
 A 18" Fir bears S 65 1/2 W., 27.3 feet, unreadable existing scribing. Posted BT and survey monument signs. Painted blazes, monuments and 6" red ring around RM trees.
 A 15" Pine bears N 53° W. 33.9 Feet. Scribed T19N R27W S 33 RM

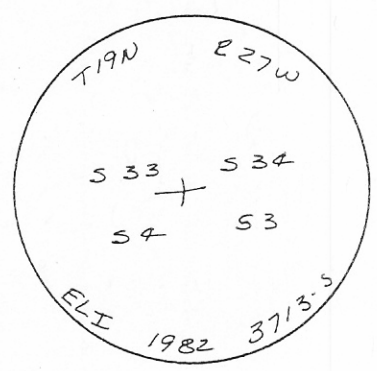

<p>SKETCH OF CORNER 58433</p>	<p style="text-align: center;">CERTIFICATION</p> <p>1. <u>Mark Roodel</u> <small>certify the information shown herein is true and correct.</small></p> <p style="text-align: right;"><u>Mark Roodel</u> <small>Signature Ground Party Chief</small></p> <p style="text-align: right;"><u>Elden L. Inabnit</u> <small>Registered Land Surveyor</small></p> <p style="text-align: right;"><u>Elden L. Inabnit</u> <small>Signature of Surveyor & Seal</small></p> <p style="text-align: right;"><u>4-20-82</u> Reg. No. <u>3713-S</u> Employer: <u>Eli & Associates</u></p>
--	--

Office of Clerk and Recorder, County of Mineral. This "corner record" was filed for record on the 2nd day of Sept 1982, at 11:01 Am, was noted on the cross-index plat and is assigned page No. _____, in book No. _____

Laurie Houston
 County Official

Sec. 34

Cross Index No. 2-13 T. 19 N R. 27 W P.M.M.
A-13 18 N 27 W

corner this sheet