

CERTIFIED LAND CORNER RECORDATION
(REFERENCE FSH 5681.65)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

At the corners of Sections 1 & 12, T 18 N, R 27 W, P.M., I found a basalt rock 6"x12"x20", 10" in the ground, marked with 5 grooves on the South and 1 groove on the North, (Record: Set a quartzite stone 20"x12"x6", 15 inches in the ground, for Corner to Sections 1, 6, 7 & 12, marked with 1 notch on the N. and 5 notches on the S. edges (survey of 1893 by Arthur Page)) (Survey of 1898 by Redfield did not close on this corner. Therefore Redfield obliterated B.T.'s in Sections 6 & 7, and the Corner is for Sections 1 & 12 of T 18 N, R 27 W.) From the corner rock I found a pine stump that bears N 44° E, 110 links distant. I could make out scribe marks. (Record: 14" Pine bears N 44° E, 110 links dist., marked "T18N, R26W, S6 BT".) (This was obliterated by Redfield in 1898.), and a 18" Pine that bears N 56° W, 152 links distant, face blaze nearly overgrown. I could make out the letter "T", (Record: 14" Pine bears N 56° W, 152 lks dist., marked "T18N R27W S1 BT"

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At the site occupied by the original stone, I set a 1 1/2" x 30" galvanized iron pipe, 20 inches in the ground, with a brass cap marked:--

Date of work 25 August 1964

I placed original rock in the hole alongside the pipe, and built a mound of rock 3 ft. base to top of brass cap.

The B.T. for Section 1 is still good.

I marked a new R.M. in Section 12 as follows:
a 10" P.Pine bears S. 65° W, 33 links distant, marked "S12 RM".

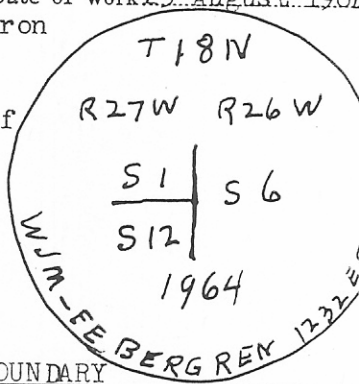

I placed an iron fence post 11 links N. of Corner, with an ATTENTION and BOUNDARY

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

Surveyor's Seal


I, William J. Morrow
certify that the information shown herein is true and correct.

William J. Morrow
Signature of Ground Party Chief

I, Frank E. Bergren
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Frank E. Bergren
Signature of Surveyor

DIAGRAM OF CORNER:



◀ = Corner recorded on the sheet

1232ES
Registration Number

Office of Clerk and Recorder, County of Mineral

This "corner record" was filed for record on the 16th day of Sept 1964, was noted on the cross-index plat and is assigned page No., in book No.

Bertie C. Morris, Deputy Clerk
County Official

Cross Index No. E.25 T. 18N R. 27W P. Mer.