

CERTIFIED LAND CORNER RECORDATION  
(REFERENCE FSM 7153.53)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

(Revised) Set a limestone 13x8x6 ins., 12 ins in the ground.  
(Found) No trace of stone as area falls in edge of present Co. road. Marked location for corner from old fence leading to the West and Old fence line leading to the South. Most of the 1/16 line fences in the section have been located from this position of the Section corner.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: June 1971

Drove a 1 1/2 ins. diam Galv. pipe 30 ins long down until the top is 1 ins below ground for position of corner and marked the following accessories. A telephone pole bears N45°44'W 23.0' dist. which we attach a metal tag to. A corner fence post bears S0°20'E 37.2' dist which we also attach a metal tag to.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

See back of page.

Surveyor's Seal

I, \_\_\_\_\_ certify that the information shown herein is true and correct.


Signature of Ground Party Chief

I, H. Gene Warren certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

H. Gene Warren  
Signature of Surveyor

27345  
Registration Number

DIAGRAM OF CORNER:

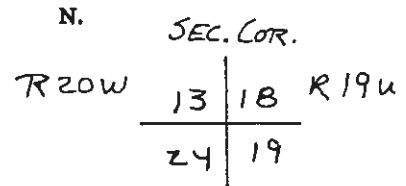

T19N

= Corner recorded on the sheet

Office of Clerk and Recorder, County of Lake

This "corner record" was filed for record on the 1 day of July 1971, was noted on the cross-index plat and is assigned page No. C-176, in book No. \_\_\_\_\_

Lamin Bannister  
County Official

THEL M. HARDING CLERK & RECORDER

Cross Index No. N-25 T 19 N R 20 W Mer.

N-1 T19N R19W