

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner

S8	S9
S17	S16


 T. 21 N. R. 29 W. P.M.M. Sanders County

GLO RECORD (1889): Set a quartz stone 30x14x5 ins., 22 ins. in the ground for the corner to secs. 8,9,16 & 17, marked 4 notches on South and East edges...established 4 BTs.

FOUND - 1989 (100 anniversary of corner): Found a 32"x15"x4" stone, broken in 2 pieces, w/1 ft. showing above ground. The top 10" piece marked with 4 notches on South and East edges. Stone falls 0.6 ft. West of a fence corner post (fences runs East-West and South). No evidence of original BTs. We accept this as being the original stone in its original position and we set a 3 1/2" aluminum cap on a 2 1/2" x 30" aluminum pipe, marked as indicated below.

- From which:
- * A 13" tamarack bears N.45°E., 60.8 feet, blazed and scribed "RM", painted red and marked w/K tag.
 - * A 19" tamarack bears N.54°W., 59.5 feet, blazed and scribed "RM", painted red and marked w/K tag.
 - * A steel post with standard MDOH decal bears S.21°E., 13.7 ft.
 - * A well casing (6") bears S.16°W., 22.1 feet.
 - * Place top portion of original stone under bottom of monument.

See Certificate of Survey No. 995

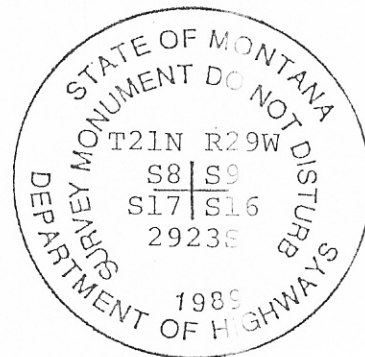

3 PAGE 20

SKETCH OF CORNER

CERTIFICATION

I, Duane Schmitz
 certify the information shown herein is true and correct.
Duane Schmitz
 Signature Ground Party Chief

I, R.A. Ainsworth
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)
R.A. Ainsworth
 Signature of Surveyor & Seal

Date: 11/89 Reg. No. 2923S
 Employer: PROFESSIONAL CONSULTANTS, INC.

Office of Clerk and Recorder, County of Sanders. This "corner record" was filed for record on Jan 12, 1990 10:08 was noted on the cross-index plat and is assigned page No. 330, in book No. 3

Donna Vaughn, Clerk-Rec.
Sally Garrison, Deputy
 County Official

Sec. 9

• - corner this sheet