

CERTIFIED LAND CORNER RECORDATION
(REFERENCE FSM 7153.53)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

corner - Set post 3 ins. square 3 ft. long marked $\frac{1}{4}$ S on North face
found - No evidence found
corner - Fir 12 ins. dia. bears N 6° E 58 lks. marked $\frac{1}{4}$ S BT
found - No evidence found
corner - Pine 20 ins. dia. bears S 35° E 62 lks marked $\frac{1}{4}$ S BT.
found - No evidence found


DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set a pipe 2 ins. dia. 24 ins. long with brass cap 18 ins. in ground for $\frac{1}{4}$ corner
to sections 7 and 6. Cap marked as shown.
Ponderosa Pine 5 ins. dia. bears N 30° E 18.8 ft. marked RM.
Ponderosa Pine 7 ins. dia. bears S 6° 30' E 22.25 ft. marked RM
Corner set by proportion.

Date of work: 12/3/79



SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

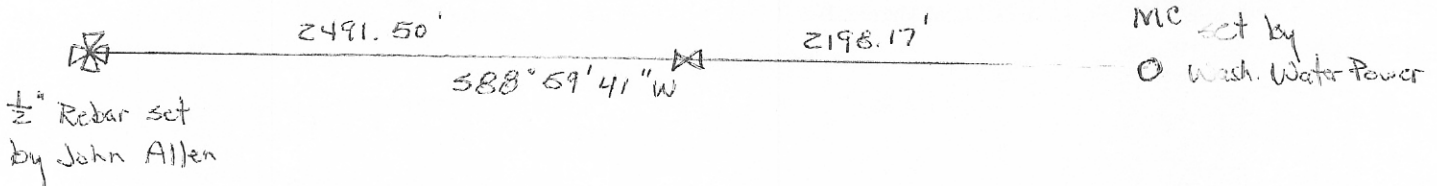


Surveyor's Seal

I, DAVID L. ORLER
certify that the information shown herein is true and correct.
David L. Orler
Signature of Ground Party Chief

I, H. GENE WARREN
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.
H. Gene Warren
Signature of Surveyor

DIAGRAM OF CORNER:

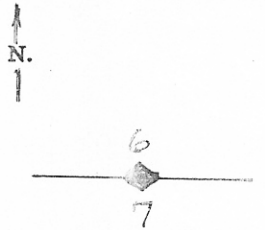

= Corner recorded on the sheet

Registration Number

BOOK 1 PAGE 336

Office of Clerk and Recorder, County of Sanders 151204
This "corner record" was filed for record on the 18th day of Dec 1979, was noted on the cross-index plat and is assigned page No. 356, in book No. 1
Dyke Vaughn Clerk + Rec
County Official
Cross Index No. E-3 T. 23 N R. 30 W Mer.