

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner S 1/4 Sec. 22 T. 23N, R. 30W P.M.M. Sanders County

Record - GLO
1893 Set a post 3 ft. long, 3 ins. square, 24 ins. in the ground, for 1/4 sec. cor. marked 1/4 S. on N. face, from which:
A fir, 15 ins. diam. bears N 15° W, 19 lks, dist. marked 1/4 S. B T.
A fir, 6 ins. diam. bears S 7 1/2° W., 24 lks. dist. marked 1/4 S. B T.

Record - GLO
1906 Set a fir post, 3 ft. long, 4 ins. sq., 24 ins. in the ground, for 1/4 sec. cor., mkd. 1/4 S 22 on N. face, and 27 on S. face, from which:
A fir, 10 ins. dia., bears N. 44° E., 79 lks. dist., mkd. 1/4 S 22 B T.
A fir, 10 ins. dia., bears S. 6 1/2° W., 24 lks. dist., mkd. 1/4 S 27 B T.

Record - BLM
1993 Set a stainless steel post, 30 ins. long, 2 1/2 ins. diam., with the top 10 ins. below the surface, with brass cap mkd:

T23 30W
 S 22
1/4 -----
 S 27

1989

from which

A fir, 14 ins. diam., bears S 55° W, 429 1/2 lks. dist., mkd. 1/4 S27 BT.


A fir, 18 ins. diam., bears N 1 3/4° W., 355 lks dist., mkd. 1/4 S22 BT.

Found - MDT
1998

Found 2 1/2 inch brass cap in field as noted above and bearing trees as described:

A fir, 14 ins. diam., bears S 55° W, 429 1/2 lks. dist. (283.6 ft. found), mkd. 1/4 S27 BT.

A fir, 18 ins. diam., bears N 1 3/4° W., 355 lks dist. (tag reads S 1 1/2° E, 235.5 ft found), mkd. 1/4 S22 BT.

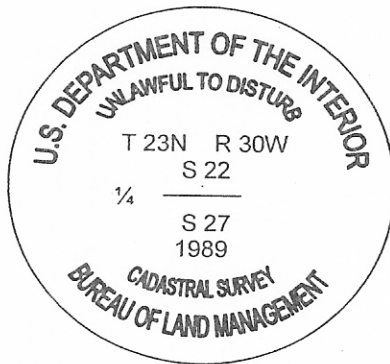

CERTIFICATION

I, Dean Sackett
certify the information shown herein is true and correct.

Signature of Ground Party Chief

I, David R. Davis
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-301, et seq., MCA)

Signature of Surveyor & Seal

Date: 2/99 Reg. No. 437 S

Employer: MDT

SKETCH OF CORNER


237127

Office of Clerk and Recorder, County of Sanders. This "corner record" was filed for record on December 2, 1999 @ 8:05 AM was noted on the cross-index plat, and is assigned Page No. _____, in Book No. _____.

4 662 Pat Ingraham
By: Ravi A. Whight, Deputy County Official

Cross Index No. R-15 T. 23N R. 30W, PMM

Sec. 22



• - Corner this sheet