

CERTIFIED CORNER RECORDATION

Corner $\frac{1}{4}$ 16 | 15 T. 25 N. R. 20 W. P.M.M. Lake County

1891 GLO Survey by Newton Orr Book 2674 Page 40

"Set a limestone 18x14x10 ins. 12 ins. in the ground for 1/4 sec. cor. marked 1/4 on W. face; from which A fir 7 ins. diam bears N. 68° E. 12 lks. dist. marked 1/4 S.B.T. A fir 6 ins. diam. bears S. 41° W. 22 lks. dist. marked 1/4 S.B.T."

1996 Remonumentation by S. R. Smith

No original evidence found. Found 1" diameter, 24" long axle set in a rock collar used as the 1/4 corner by adjoining surveys dating back to 1958. At the point marked by the axle, set a 2 1/2" diameter, 30" long aluminum pipe with a 3 1/4" diameter aluminum cap, marked as shown below. Buried the axle inside the aluminum pipe and placed a stone collar around the monument.



From which,

A larch, 11" diameter, scribed "1/4 S16 BT", bears S. 68 1/2' W., 22.35' dist. Set nail for distance measurement 2' up on north side of tree.

A fir, 12" diameter, scribed "1/4 S15 BT", bears N. 42° E., 24.36' dist. Set nail for distance measurement 7' up on south side of tree.

A 5.5' long galvanized steel post with survey decal marked "WITNESS POST PLEASE DO NOT DISTURB NEARBY SURVEY MARKER", bears Southwest, 2' dist.

Note: Bearings listed above in Remonumentation were measured with a hand compass, declination 18' East. All bearing trees marked with snow blaze, notch at base of scribing, and Bearing Tree sign. Bearings and distances are to center of tree, point for distance marked by nail set in side at height indicated.

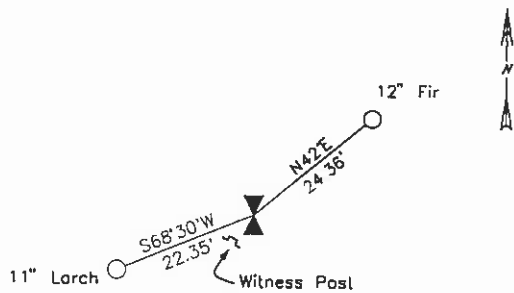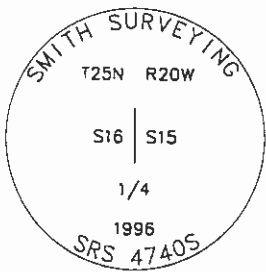

SKETCH OF CORNER

CERTIFICATION

I, Thomas E. Stark certify the information shown here is true and correct.

Thomas E. Stark
Signature Ground Party Client

I, S. R. Smith

certify that this Corner Record correctly reflects the work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-102, M.C.A.)

S. R. Smith
Signature of Surveyor & Seal

Date: 1/13/97 Reg. No. 47405

Employer: Smith Surveying

Office of Clerk and Recorder, County of Lake. This "corner

record" was filed for record on 10:42 AM JAN 13 1997

was noted on the cross-index plat and is 379288, in

Q-2091

RUTH E. HODGES

County Official

Cross Index No. L-13 T. 25N. R. 20W. P.M.M.

Sec. 16

I corner this sheet