

- INSTRUCTIONS
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CA # 226

CERTIFIED CORNER RECORDATION

Corner N 1/4 COR. SEC 18 T. 30N R. 30E P.M.M. PHILLIPS County

GLO NOTES

88
635
Subdivisions T. 30N R. 30E

Chains Soil, clay & sandy loam
1st & 2nd rates.
Timber Cottonwood of
medium size & quality
Brush, some willows & etc.
Covered with duff undergrowth
8.30 Chains

S. 89° 52' W. on a random
line bet. secs. 7 & 18.
Va 20° E.

40.00 Set temporary 1/4 sec. cor.
84.24 Intersect West boundary of
township 19 T. S. of cor.
to secs. 7, 12, 13 & 18, which is @
Thence 3 mm
East on a true line
bet. secs. 7 & 18
Va 20° E.
Over nearly level bottom
land

40.24 Set a granite stone 12x12x16 ms.
See Page 83 field notes No 8176

*On a long family plot and
property marked and
subdivided as shown for
a corner.*

87
636
Subdivisions T. 30N R. 30E

Chains 8 ins. in the ground for 4 sec.
cor. marked 4 on st. face aug.
pits 18x18x12 ins. E & W. of stone
5 1/2 ft. dist. & raised a mound
of earth 1 1/2 ft high 3 1/2 ft. base
alongside

66.54 Wagon road course S. 45° W &
N. 45° E.


72.14 Wagon road course S. 45° E. &
N. 45° W.

80.24 The cor. to secs. 7, 8, 17, & 18.
Land, nearly level bottom
Soil, clay & sandy loam
2nd rate
No timber

At noon June 15, 1891 I took
an observation for latitude
& found that the latitudes
previously used were correct
I find the latitude at the cor.
to secs. 7, 8, 17 & 18 to be 48° 21' North

EVIDENCE FOUND

NONE OF THE ORIGINAL GLO MONUMENTS COULD BE FOUND.
SET COR WITH BEST EVIDENCE - I.E. INTERSECTION OF ROAD,
LOCATION OF CANAL & CORNER USED BY PREVIOUS SURVEYOR - AS
INDICATED BY PREVIOUS PLAT FILINGS. SET A 1/2 X 24" REBAR 889ES
4" BELOW THE SURFACE OF THE GRAVEL SURFACED ROAD

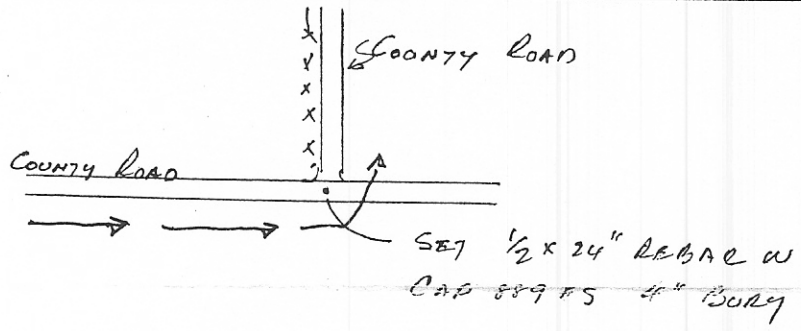

SKETCH OF CORNER

CERTIFICATION MONTANA

I, D.C. BECKMAN
certify the information shown here is true and correct.

D.C. Beckman
Signature Ground Party


DONALD C. BECKMAN
REGISTERED LAND SURVEYOR

I, D.C. BECKMAN 889ES
certify that this Corner Record corner represents work performed
by me or under my direction in compliance with the "Corner
Recordation Act" (70-22-101, et seq.)

D.C. Beckman
Signature of Surveyor & Seal

Date: _____ Reg. No. 889 ES
Employer: BECKMAN ENGINEERING

Office of Clerk and Recorder, County of _____ . This "corner
record" was filed for record on _____
was noted on the cross-index plat and is assigned page No. _____, in
book No. _____

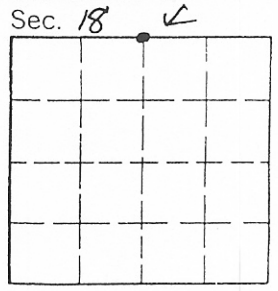

County Official _____
Cross Index No. 3 T. 30N R. 30E P.M.M.

• - corner this sheet

of certain land in the NE 1/4 of NW 1/4 of SECTION 18, T30N, R30E, M.P.M. IN PHILLIPS COUNTY, MONTANA
 ACCEMENT SURVEY FROM THE RECORD FOR THE RECORD

ZIE EREAUX

PURPOSE OF THE SURVEY: TO PROVIDE SECURITY FOR A CONSTRUCTION LOAN

$159^{\circ}16'45''W$ 2200'

ARCEL NO. 1
 888 ACRE

SECTION LINE
 NORTH 1/4 COR. SEC. 18, T30N, R30E M.P.M.
 SECTION 7
 SECTION 18
 NORTH-SOUTH MISECTION LINE

EZZIE EBERAUX

$N30^{\circ}43'15''E$ 210'

REGON 18 PARCEL NO. 12

U.S. HIGHWAY NO. 2

ETAILE
 SCALE 1"=50'

380.00
 RADIUS=5630'

A PARCEL OF LAND IN THE NE 1/4NW1/4 OF
 S.M., IN PHILLIPS COUNTY, MONTANA, MORE
 4 CORNER OF SAID SECTION 18, THEN S00D-05'E
 SECTION LINE A DISTANCE OF 1010.7 FEET TO THE
 SECTION LINE WITH THE HIGHWAY R/W LINE;
 DISTANCE OF 239.0 FEET;

$8^{\circ}30'43''RT$
 D=1.1
 $7-15738'$
 $L=30717'$
 $R=57300'$

By: *[Signature]*
 Fee: \$75 Return: *[Signature]*

County Recorder

Filed for Record this 3rd day of
 April 1987 at 10:00
 o'clock P.M. in book 208426

STATE OF MONTANA
 County of Phillips

208426

U.G.# 226

