

INSTRUCTIONS



1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Northwest Section 11 T. 35N R. 48E P.M.M. Daniels County

1. Didn't have copy of original notes. Had copy of G.L.O. Plat.
2. Didn't find a monument at this corner. Found East-West trail. Found East-West fences. Found fence going South and evidence of old trail South.
3. Set corner in centerline of East-West trail which is in centerline of fences and centerline of old trail South. Best evidence as to location of corner.

Set #5 rebar and 2" aluminum cap stamped:

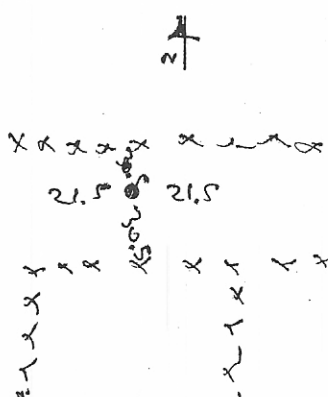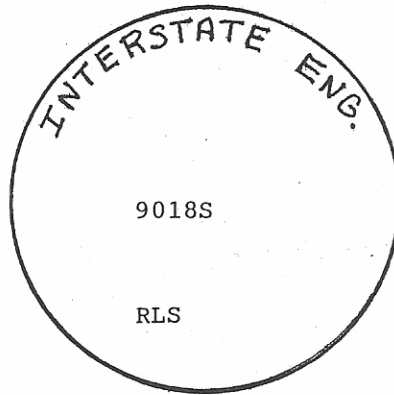

I, RICHARD H. THOM
Signature Ground Party Chief
9018S

I, Richard H. Thom
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (20-22-301 et seq.) M.C.A.)

[Signature]
Signature of Surveyor & Seal

Date: 10/90 Reg. No. 9018S
Employer: Interstate Engineering, Inc.

Office of Clerk and Recorder, County of Daniels. This "corner record" was filed for record on October 29, 1990 at 11:05 A.M. was noted on the cross-index plat and is assigned page No. _____, in book No. _____

Carol Malone
County Official

Sec. 11

| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |