

**INSTRUCTIONS**

1. Original and/or sub record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishment, lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.


**• CERTIFIED CORNER RECORDATION**

Corner 1/4 corner between Sec. 3 & 4 T. 36N R. 27W P.M.M. Lincoln County

Record: Set a sandstone 18x8x4 ins. 12 ins in the ground marked 1/4 on w. face

Dug pits for RMs.

Nothing found: Set aluminum cap by proportion.

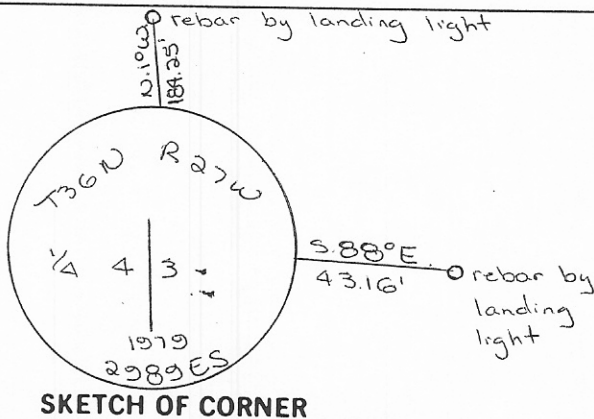

**CERTIFICATION**

I, \_\_\_\_\_ certify the information shown herein is true and correct.

[Signature]  
Signature Ground Party Chief

I, D.K. Marquardt certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

[Signature]  
Signature of Surveyor & Seal

Date 7-8-81 Reg. No. 2989ES


Employer: \_\_\_\_\_

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the February 17<sup>th</sup> day of 1981 was noted on the cross-index plat and is assigned page No. 1538, in book No. 1

Eleanor L. Vaughn by Betty L. Conces  
County Official deputy

Cross Index No. C-13 T. 36N R. 27W PMM

Sec. 4



• corner this sheet