

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner M.C. to Frac. Sec. 16 & 17 T. 9 S. R. 8 E. P.M.M. Park County


1. In July 1883, U.S. Deputy Surveyor Rodney W. Page set on the left bank of the Yellowstone River a granite stone 16"x10"x6" about 11" in the ground for a meander corner to fractional sections 16 and 17 marked MC and raised a mound of stone 2' high, 4½' base along side. Pits were impracticable.

In 1916, George F. Rigby and Clarence K. Streit in a retracement of the line between sections 16 and 17 were unable to find the meander corner set by Page. They were about to set a new M.C. when they unearthed the original meander corner which was a granite stone 16"x8"x5" marked MC. They reset this stone 10" in the ground and raised a mound of stone, 2' base, 1½' high south of corner.

2. I found a granite stone 5"x8"x8" above ground, firmly set, marked MC and a mound of stone, 2' base south of corner. I accepted this stone as the original stone set by Page and reset by Rigby and Streit.
3. Paint original stone orange and rebuild mound of stone to a height of 2'.

Set 5/8"x 24" rebar with aluminum cap marked RM 2
Bears N 23°-04'W, 10.50'

Set 5/8"x24" rebar with aluminum cap marked RM 1
Bears S88°-21'E, 12.13'

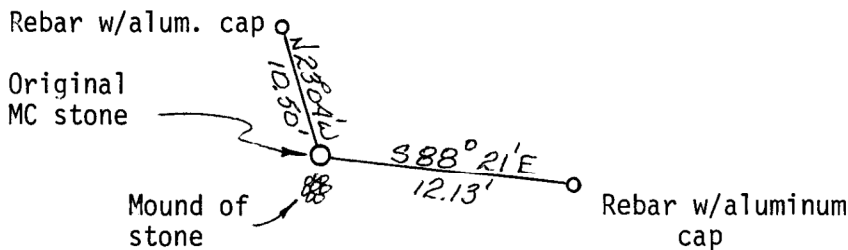

SKETCH OF CORNER

CERTIFICATION

I, Steven J. Barber
certify the information shown herein is true and correct.

Steven J. Barber
Signature Ground Party Chief

I, Michael R. Weldon
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-301, et seq., M.C.A.).

5/84
Date: _____ Reg. No. _____
Employer: U.S. Forest Service

180728
Professional Engineer & Land Surveyor Seal
MICHAEL R. WELDON
REG. NO. 76921 S
STATE OF MONTANA
EXPIRES SEP. 16, 1985

Office of Clerk and Recorder, County of Park. This "corner record" was filed for record on June 11, 1984 @ 12:08 PM was noted on the cross-index plat and is assigned page No. 66, in book No. one

James Jennings
County Official

		16	

Cross Index No. JK-9 T. 9 S R. 8 E P.M.M.

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

• - corner this sheet