

153900

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner #135 N $\frac{1}{4}$  Corner Section 21 T. 16 N R. 12 E P.M.M. Judith Basin County


RECORD: 39.75 chains "Deposited a marked stone 12 ins. in the ground for  $\frac{1}{4}$  sec. cor. dug pits 18 x 18 x 12 ins. E. and W. of stone. 5 $\frac{1}{2}$  ft. dist. and raised a mound of earth 1 $\frac{1}{2}$  ft. high 3 $\frac{1}{2}$  ft. base over it. In east pit drove a stake 2 ft. long. 2 ins. square 12 ins. in the ground. marked  $\frac{1}{4}$  S. on N. face"

FOUND: No evidence of original corner or accessories. Railroad construction obliterated evidence of original corner.

METHOD: I reestablish the  $\frac{1}{4}$  corner at proportional distance between the section corners. This corner falls 60 feet west of the Railroad track.

SET: A 3 $\frac{1}{4}$  inch diameter aluminum cap riveted to a 30 inch flared aluminum tube 2 $\frac{1}{2}$  inches in diameter and marked as shown. (Cap is 5" out of the ground)

ACCESSORIES: The section corners to the East and West are as follows:  
S. 89° 38' 10" E., - 2,660.43 feet  
N. 89° 38' 10" W., - 2,660.44 feet

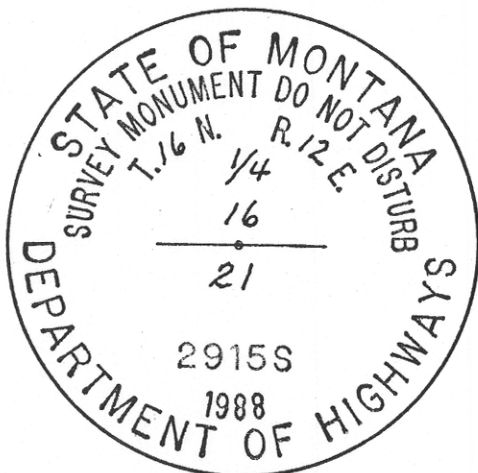

SKETCH OF CORNER

CERTIFICATION

I, \_\_\_\_\_  
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Gerald S. Ditto  
certify that this Corner Record correctly represents work performed by me or under by direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Gerald S. Ditto  
Signature of Surveyor & Seal

Date: 2-23-89 Reg. No. 2915 S


Employer: Self

Office of Clerk and Recorder, County of Judith Basin. This "corner record" was filed for record on the November 20 day of 1989 was noted on the cross-index plat and is assigned page No. \_\_\_\_\_, in book No. File No. 543

(453 ?)

Gerald S. Ditto  
County Official

Cross Index No. N-11 T. 16N R. 12E P.M.M.



• - corner this sheet