

CERTIFIED LAND CORNER RECORDATION


Corner Northeast corner of Section 29 T. 28N, R. 40E, P.M.M.

GLO RECORD

The cor. of secs. 20,21,28, and 29, marked by the original monument, a limestone, 12x9x5 ins. firmly set and properly marked as described in the official record.

At the corner point,

Set an iron post, 3 feet long, 2 ins in diameter, 34 ins. in the ground, with brass cap mkd.

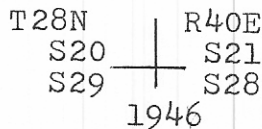

Raise a mound of stone 3 ft base, 1½ ft. high W of cor. Bury the old stone in hole alongside the iron post. The notes also indicate the corner is 40.25 feet from the center of the track of the then Great Northern (now Burlington Northern) Railroad. We found it to be 40 feet from the edge of the steep cut adjacent to the railroad.

EVIDENCE FOUND

The iron post with brass cap marked as described, with the small pile of stones to the West. As stated above, the corner is more than 40.26 from the centerline of the present tracks. The corner is close to the railway right of way fence., and is easily visible when near the fence line. No R.M.'s set.

I, D. C. Beckman  
certify that the information shown herein is true and correct.

D. C. Beckman

Signature of Ground Party Chief

I, D. C. Beckman  
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

D. C. Beckman

Signature of Surveyor

23 JAN 1980

Date

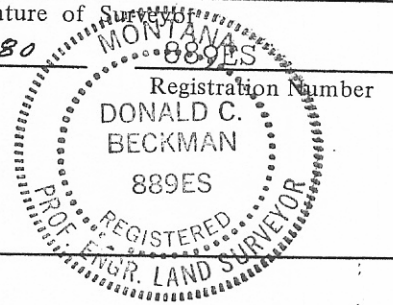


DIAGRAM OF CORNER

STATE OF MONTANA

Office of Clerk and Recorder, County of VALLEY

This "corner record" was filed for record on the 25th day of JANUARY 19 80, at 2:30 P.M., was noted on the cross-index plat and is assigned page No. 113 in book No. 1.

CORNER RECORDATIONS

FEE: 1.50 Pd.

RET: File.

Mary Lee Eide

County Official

Mary Cih

By

Deputy

Cross Index No. R, 9 T. 28N R. 40E P. M. M Mer.